





### WHAT'S IN THE BOX

- 1) Black dome with neck (1" / 25mm D)
- 2) Smartpole X1S with accessories
- 3) Fully threaded steel stud (4" L)

Bag with items 4 through 7:

- 4) Hex nut 
- 5) Locking washer 
- 6) Big washer 
- 7) Plastic cable ties 




### FOLLOW THESE STEPS FOR THE CORRECT INSTALLATION OF THE PRODUCT IN A STUDIO TABLE:

- 1) Drill a 1/4" hole in the studio table where you want the camera to be located.

*Camera location estimations: 20" to 30" from the subject, for a close-up of the subject when using Logitech C920 camera. Place the camera further away from the subject for wide angle shots.*

*Exact location of the camera and drilling hole will depend on the camera being used.*

- 2) Insert the stud into the drilled hole.
- 3) Use lock washer and big washer provided to secure the nut below the table. Screw nut to threaded stud below the table until firmly adjusted.
- 4) Adjust height of the stud moving the black dome and nut until desired position.

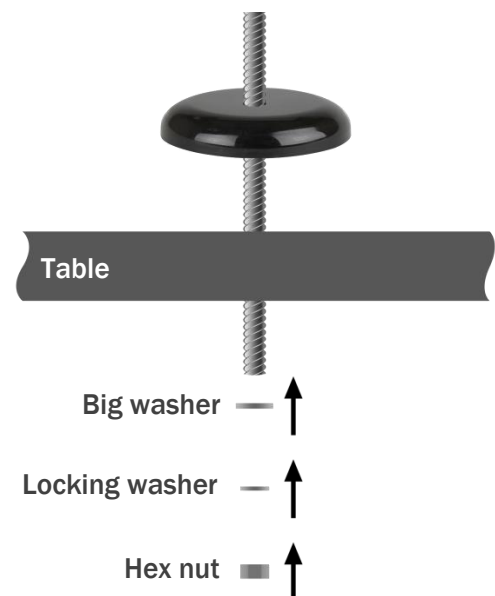

## Installation Guide

- 5) Mount the camera using the 1/4" thread at the base of the unit. Adjust camera and Smartpole on the best position and lock its movement.
  
- 6) Use cable ties to secure camera cable to the Smartpole.

